


### Improved Front Lance Support




- 1-Man operation with easy to use and efficient crank handles.
- Stainless Steel Acme thread with brass insert eliminates galling due to corrosion.
- 8 different counter weight combinations make it easier to match lifting power to rattling device weight.
- Roller is easily replaceable & reduces friction on lance during lifting.
- Optional roller materials available.
- Engineered by the OEM putting Safety First.

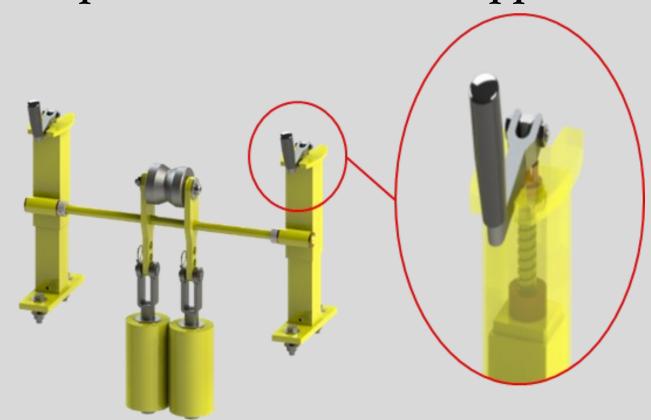


Due to various design changes throughout the years, compatibility must be verified before installing an Improved Front Lance Support on an existing Pipe Cleaning Machine. Please feel free to contact Hub City Iron Works for any questions regarding compatibility of older machines with Improved Front

#### 1. Identify previously used Front Lance Support brackets.

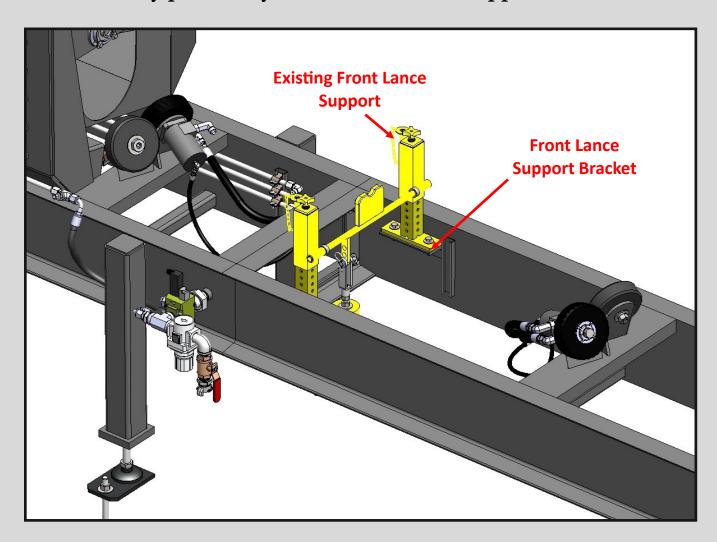




2. Measure the distance from the top of the Frame Channel to the top of the Front Lance Support Bracket.

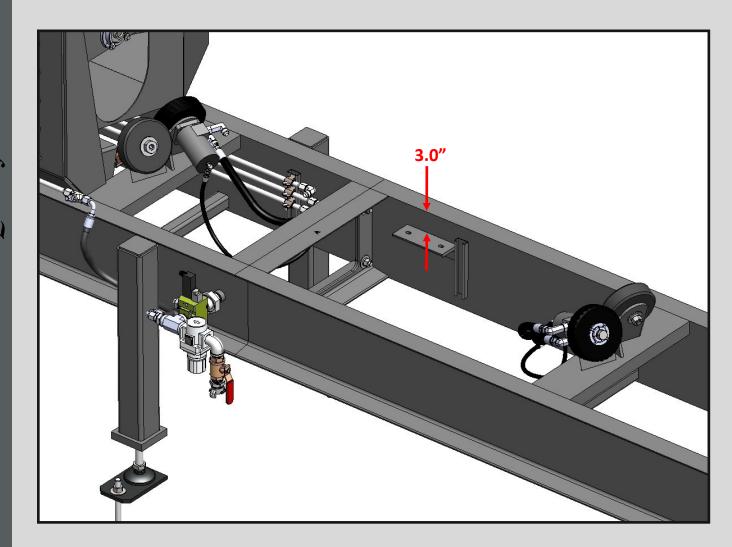



3. Measure the center distance between the holes on the brackets.

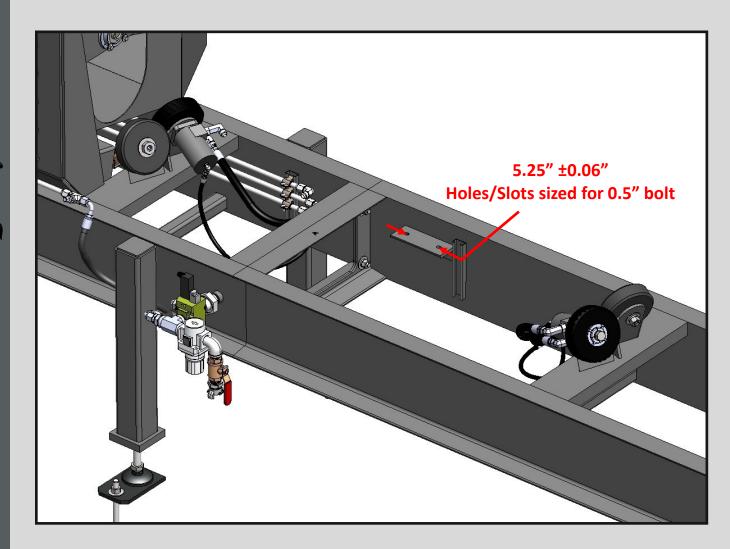



4. Measure the center distance between the holes between brackets.

